




PANDA 60 Cell 40mm SERIES

YL280C-30b
YL275C-30b
YL270C-30b
YL265C-30b
YL260C-30b
YL255C-30b
YL250C-30b

panda
Powered by **YINGLI**

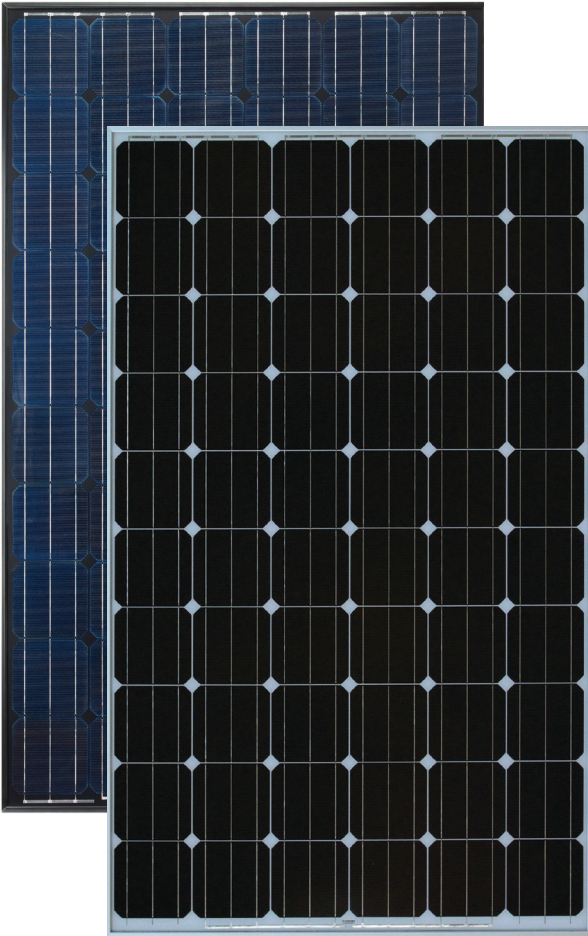

ABOUT YINGLI GREEN ENERGY

Yingli Green Energy Holding Company Limited (NYSE: YGE) is one of the world's largest fully vertically integrated PV manufacturers, which markets its products under the brand "Yingli Solar". With over 4.5GW of modules installed globally, we are a leading solar energy company built upon proven product reliability and sustainable performance. We are the first renewable energy company and the first Chinese company to sponsor the FIFA World Cup™.

PERFORMANCE

- Yingli Solar PANDA is a new monocrystalline silicon module technology with n-type solar cells that have average efficiencies higher than 19.5%. Combined with high transmission glass, module efficiencies are up to 17.1%.
- Compared to traditional modules with p-type solar cells, PANDA modules have lower initial degradation and higher performance under both high temperature and low irradiation conditions.
- Tight positive power tolerance of 0W to +5W ensures you receive modules at or above nameplate power and contributes to minimizing module mismatch losses leading to improved system yield.
- Top ranking in the "TÜV Rheinland Energy Yield Test" demonstrates high performance and annual energy production.

RELIABILITY

- Tests by independent laboratories prove that Yingli Solar modules:
 - ✓ Fully conform with certification and regulatory standards.
 - ✓ Withstand wind loads of up to 2.4kPa and snow loads of up to 5.4kPa, confirming mechanical stability.
 - ✓ Successfully endure ammonia and salt-mist exposure at the highest severity level, ensuring their performance in adverse conditions.
- Manufacturing facility certified by TÜV Rheinland to ISO 9001:2008, ISO 14001:2004 and BS OHSAS 18001:2007.

WARRANTIES

- 10-year limited product warranty¹.
- Limited power warranty¹: 1 year at 98% of the minimal rated power output, 10 years at 92% of the minimal rated power output, 25 years at 82% of the minimal rated power output.

¹In compliance with our Warranty Terms and Conditions.

QUALIFICATIONS & CERTIFICATES

IEC 61215, IEC 61730, MCS, CE, ISO 9001:2008, ISO 14001:2004, BS OHSAS 18001:2007, SA 8000, PV Cycle



PANDA 60 Cell 40mm SERIES

ELECTRICAL PERFORMANCE

Electrical parameters at Standard Test Conditions (STC)

| Module type | YLxxxC-30b (xxx=P _{max}) | | | | | | | | |
|-----------------------------|------------------------------------|---|-------|------|------|------|------|------|------|
| | P _{max} | W | 280 | 275 | 270 | 265 | 260 | 255 | 250 |
| Power output | P _{max} | W | 280 | 275 | 270 | 265 | 260 | 255 | 250 |
| Power output tolerances | ΔP _{max} | W | 0 / 5 | | | | | | |
| Module efficiency | η _m | % | 17.1 | 16.8 | 16.5 | 16.2 | 15.9 | 15.6 | 15.3 |
| Voltage at P _{max} | V _{mpp} | V | 31.1 | 30.8 | 31.1 | 31.0 | 30.8 | 30.6 | 30.5 |
| Current at P _{max} | I _{mpp} | A | 9.01 | 8.94 | 8.68 | 8.55 | 8.46 | 8.33 | 8.20 |
| Open-circuit voltage | V _{oc} | V | 38.9 | 38.6 | 39.0 | 39.0 | 38.6 | 38.3 | 38.1 |
| Short-circuit current | I _{sc} | A | 9.61 | 9.55 | 9.06 | 8.93 | 8.91 | 8.85 | 8.71 |

STC: 1000W/m² irradiance, 25°C cell temperature, AM1.5g spectrum according to EN 60904-3.
Average relative efficiency reduction of 3.5% at 200W/m² according to EN 60904-1.

Electrical parameters at Nominal Operating Cell Temperature (NOCT)

| Power output | YLxxxC-30b (xxx=P _{max}) | | | | | | | | |
|-----------------------------|------------------------------------|---|-------|-------|-------|-------|-------|-------|-------|
| | P _{max} | W | 202.8 | 199.2 | 195.6 | 192.4 | 188.8 | 185.2 | 181.6 |
| Voltage at P _{max} | V _{mpp} | V | 28.3 | 28.0 | 28.3 | 28.1 | 27.8 | 27.7 | 27.6 |
| Current at P _{max} | I _{mpp} | A | 7.17 | 7.12 | 6.91 | 6.86 | 6.79 | 6.68 | 6.58 |
| Open-circuit voltage | V _{oc} | V | 45.7 | 44.7 | 36.1 | 35.9 | 35.5 | 35.2 | 35.1 |
| Short-circuit current | I _{sc} | A | 7.78 | 7.74 | 7.34 | 7.20 | 7.18 | 7.13 | 7.02 |

NOCT: open-circuit module operation temperature at 800W/m² irradiance, 20°C ambient temperature, 1m/s wind speed.

THERMAL CHARACTERISTICS

| Nominal operating cell temperature | NOCT | °C | 46 +/- 2 |
|---|-------------------|------|----------|
| Temperature coefficient of P _{max} | γ | %/°C | -0.42 |
| Temperature coefficient of V _{oc} | β _{Voc} | %/°C | -0.31 |
| Temperature coefficient of I _{sc} | α _{Isc} | %/°C | 0.04 |
| Temperature coefficient of V _{mpp} | β _{Vmpp} | %/°C | -0.41 |

OPERATING CONDITIONS

| | |
|---|---------------------|
| Max. system voltage | 1000V _{DC} |
| Max. series fuse rating | 20A |
| Limiting reverse current | 20A |
| Operating temperature range | -40°C to 85°C |
| Max. static load, front (e.g., snow and wind) | 5400Pa |
| Max. static load, back (e.g., wind) | 2400Pa |
| Max. hailstone impact (diameter / velocity) | 25mm / 23m/s |

CONSTRUCTION MATERIALS

| | |
|--|---|
| Front cover (material / thickness) | low-iron tempered glass / 3.2mm |
| Backsheet (color) | white or black |
| Cell (quantity / material / dimensions) | 60 / monocrystalline silicon / 156mm x 156mm |
| Encapsulant (material) | ethylene vinyl acetate (EVA) |
| Frame (material / color / anodization color) | anodized aluminum alloy / silver or black / clear |
| Junction box (protection degree) | ≥ IP65 |
| Cable (length / cross-sectional area) | 1100mm / 4mm ² |
| Plug connector (type / protection degree) | MC4 / IP67 or YT08-1 / IP67 or Amphenol H4 / IP68 |

- Due to continuous innovation, research and product improvement, the specifications in this product information sheet are subject to change without prior notice. The specifications may deviate slightly and are not guaranteed.
- The data do not refer to a single module and they are not part of the offer, they only serve for comparison to different module types.

Yingli Green Energy Holding Co. Ltd.

service@yinglisolar.com

Tel: 0086-312-8929802

YINGLISOLAR.COM

© Yingli Green Energy Holding Co. Ltd. | DS_PANDA60Cell-30b_40mm_EU_EN_201211_v02.20



GENERAL CHARACTERISTICS

| | |
|------------------------|-----------------------|
| Dimensions (L / W / H) | 1650mm / 990mm / 40mm |
| Weight | 19.1kg |

PACKAGING SPECIFICATIONS

| | |
|--------------------------------------|--------------------------|
| Number of modules per pallet | 26 |
| Number of pallets per 40' container | 28 |
| Packaging box dimensions (L / W / H) | 1700mm / 1150mm / 1190mm |
| Box weight | 534kg |

Unit: mm

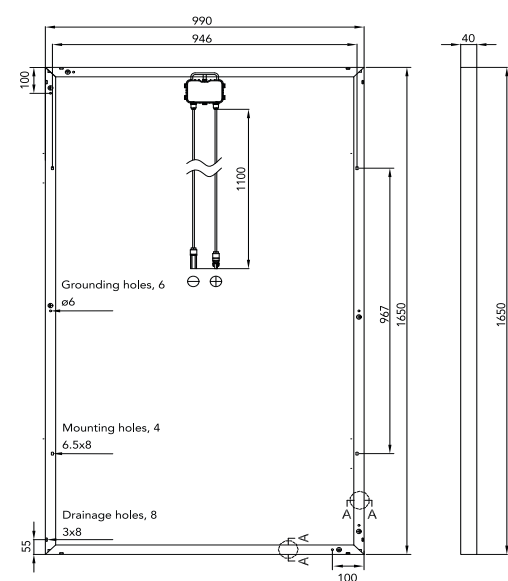

Warning: Read the Installation and User Manual in its entirety before handling, installing, and operating Yingli Solar modules.

Our Partners:

