

DIMENSION DATA

SIZE	A MAX	B MAX	C MAX	D DIA	E REF	F ±.015	L MAX	M MAX	T MAX	FOR USE WITH CAMLOC STUDS	RECOMMENDED HOLE SIZE
5	.995	.510	.770	.328	.406	.430	.562	.750	.090	SERIES 2600, 2700	.375
7	1.100	.650	.920	.438	.531	.445	.625	.812	.100	SERIES 4002	.500


MATERIAL DATA

CODE	MATERIAL	FINISH
V	GLASS/POLYETHERIMIDE	ABRASIVE CLEAN

OPTIONAL PRIMER

CODE	MATERIAL	SPEC.
P	EPOXY PRIMER	MIL-P-85582

EXAMPLE PART NUMBER

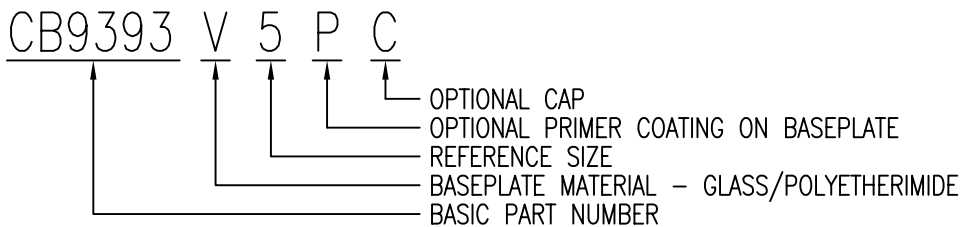

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES AND TOLERANCES ARE AS SHOWN BELOW. DIMENSIONAL TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1982.

PROPRIETARY PARTS SHOWN IN THIS DRAWING ARE THE SUBJECT OF ISSUED UNITED STATES AND FOREIGN PATENTS AND PATENTS PENDING. UNAUTHORIZED REPRODUCTION AND/OR DISTRIBUTION OF THIS DRAWING IS SPECIFICALLY PROHIBITED.

GLICK BOND

CARSON CITY
NEVADA 89706

APPROVALS		DATE	TITLE			
ANGLES	±1°	DRAWN BPEREZ	RECEPTACLE, QUARTER TURN FASTENER, COMPOSITE			
.XX	±.03	CHECKED DOC	SIZE	CAGE CODE	DWG. NO.	REV.
.XXX	±.010	RELEASED CGH	A	66530	CB9393	2
.XXXX	±.001	REVISED BPEREZ	SCALE	2/1 2MAY03		SHEET 1 OF 1