





PAOLO ASTORI

PAOLO ASTORI s.r.l.
via Mirabella 9-MAGGIATE SUP.
I 28013-GATTICO (NO)



A7K20

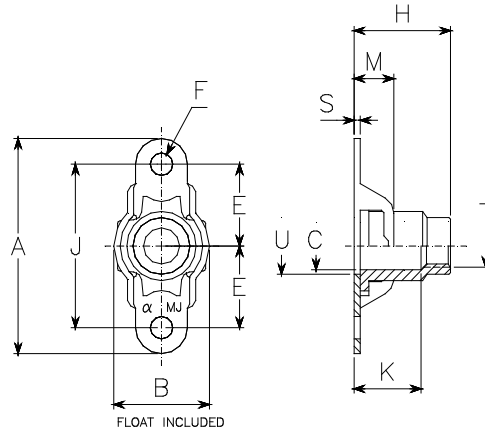

dimensioni in mm. dimensions in mm.

| dimensions code | thread T | tolerance | A max. | B max. | C min. | E ±0,1 | F +0,2 | J ±0,05 | H max. | K min. | M max. | S max. | U min. | mass (kg x 1000) |
|-----------------|-----------|-----------|--------|--------|--------|--------|--------|---------|--------|--------|--------|--------|--------|------------------|
| 05004 | MJ5 x 0,8 | 4H-6H | 25,2 | 11,0 | 5,45 | 9,5 | 2,5 | 19,00 | 8,4 | 4,0 | 4,6 | 0,8 | 6,5 | 3,06 |
| 05006 | | | | | | | | | 10,4 | 6,0 | | | | 3,34 |
| 05008 | | | | | | | | | 12,4 | 8,0 | | | | 3,62 |
| 05010 | | | | | | | | | 14,4 | 10,0 | | | | 3,9 |
| 06004 | MJ6 x 1 | 4H-5H | 29,2 | 13,1 | 6,2 | 11,0 | 2,5 | 22,00 | 9,4 | 4,0 | 4,6 | 0,8 | 7,5 | 3,6 |
| 06006 | | | | | | | | | 11,4 | 6,0 | | | | 3,9 |
| 06008 | | | | | | | | | 13,4 | 8,0 | | | | 4,2 |
| 06010 | | | | | | | | | 15,4 | 10,0 | | | | 4,5 |
| 08004 | MJ8 x 1 | 4H-5H | 29,2 | 16,0 | 8,2 | 11,0 | 3,0 | 22,00 | 11,4 | 4,0 | 4,6 | 1,0 | 9,5 | 6,9 |
| 08006 | | | | | | | | | 13,4 | 6,0 | | | | 7,9 |
| 08008 | | | | | | | | | 15,4 | 8,0 | | | | 8,9 |
| 08010 | | | | | | | | | 17,4 | 10,0 | | | | 9,9 |

| material code | material | finish | hardness HR _C | strenght class | temperature class |
|---------------|-----------|--|--------------------------|----------------|-------------------|
| A7K20X | W1.4944.4 | passivation | 27 min. | 1100 MPa | 425°C |
| A7K20L | | passivation+MoS ₂ + green dot | | | 315°C |
| A7K20A | | silver plating | | | 425°C |

THREAD: according to MJ profile ISO 5855.
 FLOAT: min. 0,5 mm radially from the centre
 MARKING: manufacturer symbol α and MJ letters
 PROCUREMENT SPEC.: ISO5858.
 ASTORI CALL OUT: materials code-dimensions code.

| | | |
|-----------------------------|---|--------------|
| Reference JN00135 | PLATE NUT, SELF-LOCKING FLOATING, TWO LUGS, CRES VARIABLE DEEP COUNTERBORE | A7K20 |
|-----------------------------|---|--------------|