





PAOLO ASTORI s.r.l.  
via Mirabella 9-MAGGIATE SUP.  
I 28013-GATTICO (NO)



**FR731-12**

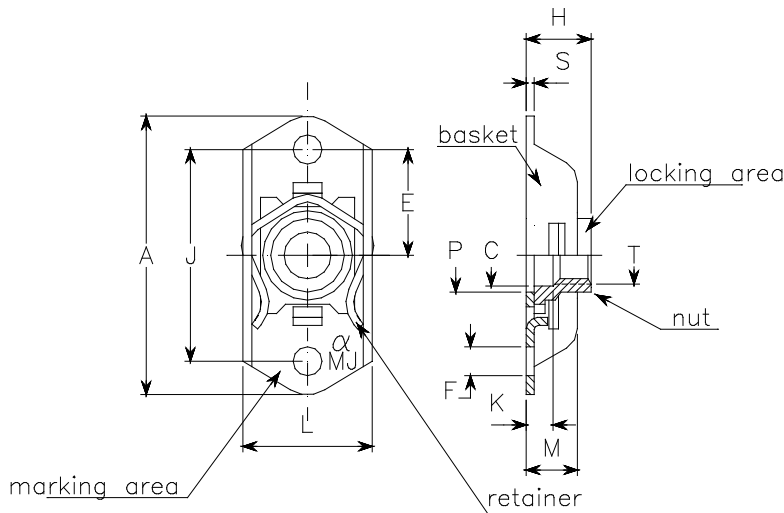

Dimensions in mm

assembly code	thread T	toll.	A max.	C min.	E ±0,1	F 0 +0,2	J ±0,05	H max.	K min.	L max.	M max.	P min.	S ±0,1	mass kg x 1000 pcs
FR731-12	MJ12x1,25	4H-5H	35,2	12,5	13,0	3,5	26,00	12,0	3,5	22,5	7,0	13,5	1,0	14,5

component	component codes	material	finish	hardness HR <sub>C</sub>	strenght class	temperature class
nut	FR731N-12	W1.4944.4	passivation+solid film lubricant iaw MIL-L-46010	28-36	1100 MPa	315°C
basket	FR731B-12	W1.4944.4	passivation			
retainer	FR731R-12	CRES 302 passivated				

FLOATING: horizontal mm 0,75 min.radially from centre, vertical mm 0,4 max.  
 THREAD: iaw ISO5855 before locking deformation  
 MARKING: Manufacturer symbol and letters MJ  
 PROCUREMENT SPEC. ISO5858

ref.:	<b>ANCHOR NUT, S/L FLOATING, TWO LUGS, REPLACEABLE NUT ELEMENT, CRES, 1100MPa/315°C</b>	<b>FR731-12</b>
-------	---	-----------------