

4

3

2

1


THE INFORMATION AND DESIGN HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF SKYLOCK INDUSTRIES INCORPORATED. SKYLOCK INDUSTRIES INCORPORATED RESERVES ALL PATENT, PROPRIETARY, DESIGN MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THERE TO, AND TO ANY ARTICLE DISCLOSED THEREIN EXCEPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE FOREGOING DOES NOT APPLY TO VENDOR PROPRIETARY PARTS.

REVISIONS


ZONE	LTR	DESCRIPTION	DATE	APPROVED
	NC	PRODUCTION RELEASE	9-13-99	T. CSIK

NOTES: UNLESS OTHERWISE SPECIFIED.

- REF. MAT'L: BUTTON & HOUSING; ALLOY 360 BRASS PER ASTM B16 OR EQUIV., VALVE ASSY (MAJOR COMPONENTS); 303 CRES PER AMS-5640, OR EQUIV.
- REF. FINISH: SATIN CHROME PLATE APPEARANCE SURFACES PER QQ-C-320, OR EQUIV.

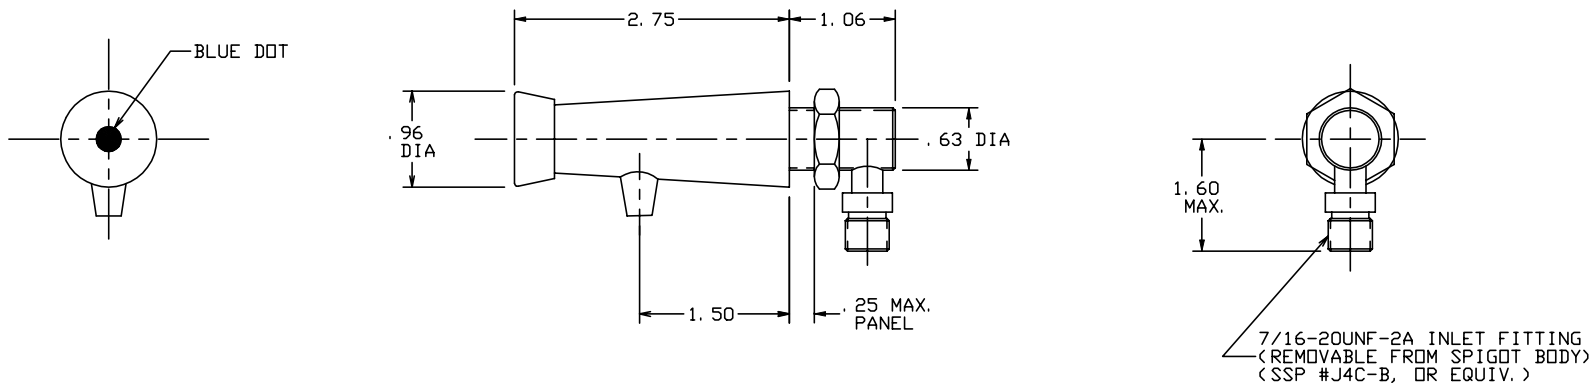

-401 SPIGOT

-401		SPIGOT ASSY		(SELF-VENTING)		190098-401	
PART NO.	DESCRIPTION	MATERIAL	SIZE	SPECIFICATION	MAKE FROM		
PARTS LIST							
UNLESS OTHERWISE SPECIFIED		DRAWN BY	T. CSIK	8-16-99	 SKYLOCK INDUSTRIES INCORPORATED MONROVIA CALIFORNIA U. S. A.		
DIMENSIONS ARE IN INCHES		CHECKED	E. WELSH	9/13/99			
TOLERANCES ON		ENGINEER	T. CSIK	9/13/99			
DECIMALS ANGLES DRILLED HOLES		MFG	P. MATSUOKA	9/16/99			
.X ± .1 ± 0° 30' AND 10387		QC	J. VIVIRITO	9/17/99	SPIGOT		
.XX ± .03							
.XXX ± .010							
DO NOT SCALE THIS DRAWING							
MATERIAL - FINISH		USED ON		SIZE	CODE IDENT. NO.	DRAWING NO.	REV.
NEXT ASSY				C	51941	90098	NC
MANUFACTURE IN ACCORDANCE WITH SKYLOCK IND., INC. QUALITY CONTROL MANUAL QC. 001.				SCALE	1/1	VT.	SHEET 1 OF 1

FLUID MEDIA	OPERATING PRESSURE	OPERATING TEMP.	FLOW
POTABLE WATER	2-120 PSIG	35°F TO 225°F	70 OZ. /MIN. AT 70°F AND 30 P. S. I. INLET PRESSURE

4

3

2

1